



FUTURE SFT/XE

SERIES

DTV Transmitters eXtreme Efficiency (XE)

www.screen.it



Screen is a world-renowned company
focused on turn-key and end-to-end
solutions for all broadcasting needs.

With more than 28 years of experience, thousands of
satisfied customers and more than 60.000 transmitters
installed all over the world, Screen is the leading
company in digital TV technology.

www.screen.it





FUTURE SFT/XE

SERIES


The combination of ARK-X New Exciter and the SFK/XE Amplifier Series (eXtreme Efficiency)

The New Multiple Configuration Flexible Hardware Platform

The ARK-X Universal Driver with Multiple Front-End Boards

Widely improved performances compared to ARK6

Flexible Software configuration
and fully frequency agile

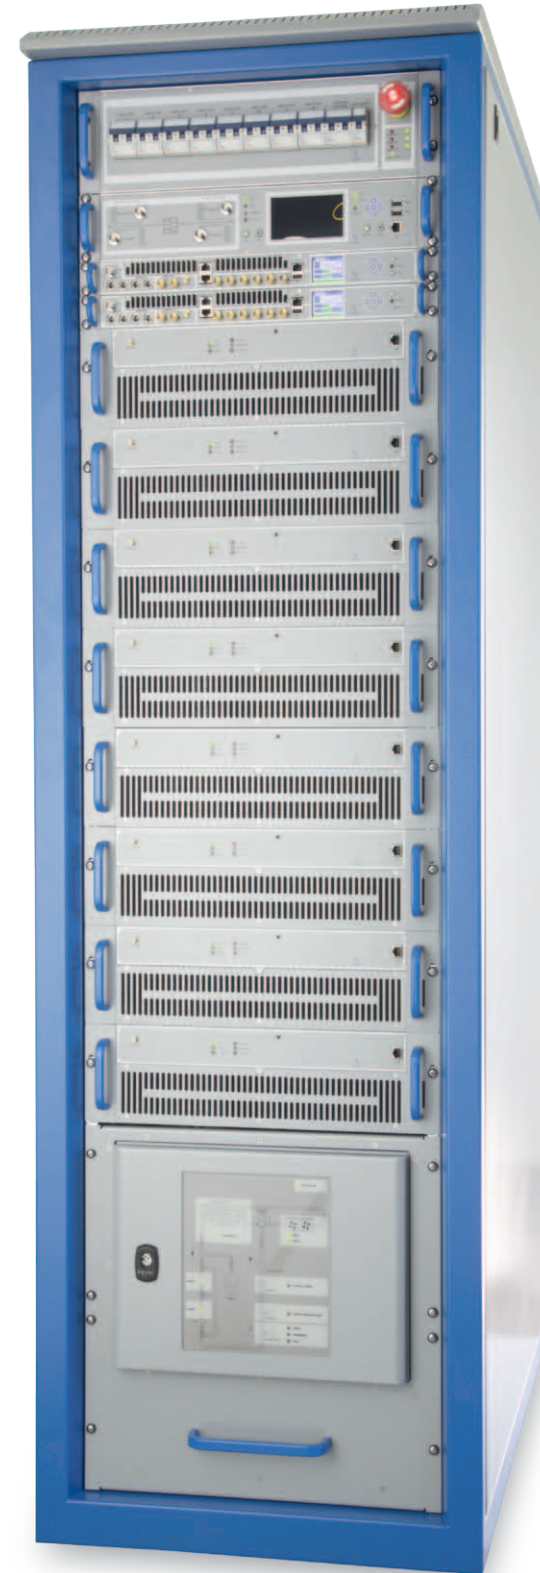

The New Revolutionary FUTURE SFT/XE eXtreme Efficiency DTV TRANSMITTER SERIES is reaching the highest technology level in both TV Digital Signal Processing and RF domain.

The top performances of this Transmitters Series are possible thanks to the following points:

1) **ARK-X**: the new evolution of the ARK Series multistandard DTV Drivers, the ARK-X Series, able to meet or exceed all the DTV International Broadcasters requirements.

The improvement of digital adaptive precorrection and configuration flexibility was the key points for this advanced product, developed by the excellent Screen R&D Digital Signalling dept.

2) **XET™ (eXtreme Efficiency Technology)**: the new Screen XET™ (eXtreme Efficiency Technology) as the result of using latest generation LDMOS devices (more rugged and efficient compared to the past), with a special low-loss design of matching and combining system, together with extremely high-efficiency power supplies (over 96% efficiency).

This XET™ Technology, applied to the amplifier section of the FUTURE SFT/XE Transmitters, grants up to 42% overall efficiency in this new Series.

3) **Compactness**: the highest efficiency, reached thanks to the above-mentioned technology, combined with a new concept of heatsync and ultracompact power supplies grants the minimum sizes of amplifier modules with air cooling or liquid cooling systems, and a greatly reduced dimensioning of the cooling system itself. A 10 kW rms DTV Transmitter in a single rack is just an example of this extreme compactness.

4) **Easy and Fast maintenance**: Screen Group's 25 years' experience allowed for designing this new FUTURE SFT/XE SERIES with a significantly improved easy-maintenance concept.

All RF power modules are hot pluggable (both liquid and air cooled versions) for an easy bench testing and/or instant replacement on site.

All RF power modules are equipped with 3 independent power supplies for maximum redundancy and easy single phase or balanced three phases operation selection. These 3 power supplies are also hot pluggable themselves, for a unique way of smart maintenance.

The latest generation of industry higher class power supplies grants over 96% efficiency with wider input AC range capability and greater ruggedness.

5) **Smart System Design**: latest generation progressive RF combiner with ultracompact unbalancing dummy loads and a smart intercommunication interface between RF modules, drivers and Logical Control System allow for a very clean and easy to maintain system configuration both for liquid and air cooling equipment.

**Screen FUTURE SFT/XE is how
we are driving the Future!**

ARK-X

Features

Transmitter, Gap Filler, Transposer, Re-Transmitter
Dual cast Analog + Digital Multi standard

The Universal DRIVER can be customised in 5 different configurations.
All ARK-6 are always and easily upgradable to new features.



The New ARK-X Series is the result of years of research and represents the state of the art of the worldwide DTV transmitter technology.

We call it Universal Driver because of its incredible capability to be configured with one hardware and just software selection.

It is perfect for international broadcasters doing business in several countries – to increase manageability of investment through reduction of transmitter types - and national broadcasters, due to its versatility in operation modes and configuration. Indeed, it can be used as a transmitter, a heterodyne transposer, a regenerative transmitter, a gap filler, all in a single piece of hardware.

ARK-X UNIVERSAL DRIVER is resilient to future evolutions of technology and standardization: this driver guarantees a perfect upgrade path for new modulation schemes that researchers will deliver.

Besides, ARK-X UNIVERSAL DRIVER already implements DVB-T/T2, ATSC, ISDB-T, DTMB, ATV modulations.

The ARK-X allows selection of operation modes in various ways: remotely, using a dry contact; via SNMP commands; via TCP/IP, using the Web graphic interface; or even via a dedicated command inserted into the transport stream.

Functional interfaces are available for total remote control of the apparatus by means of serial protocols or TCP/IP ports. Thanks to the internal Web server the apparatus can be easily monitored and configured and updated using a LAN connection and a standard Web browser.

Moreover, the built-in SNMP agent allows full automated remote control compatible with all SNMP NMS (Network Management System)

New improved features compared to previous Series:

- Color large-sized display with important monitoring measures: spectrum, constellation, etc
- Upgrade through USB
- Upgrade through OTA
- Licensing upgrade
- T2 + T2 lite simultaneous mode
- ISDBT-Tb De-Compressor Embedded
- Property Crest Factor optimization algorithm (PAPR equivalent)
- Powerful pre-corrections to improve efficiency
- GPS Glonass, Galileo, BeiDou integrated
- 2 input IP redundant with seamless switch (GBE Gigabit Ethernet)
- Pluggable Front End
- New user-friendly web interface
- Backward full compatibility with all ARK6 based TX
- Energy-saving system (automatic power reduction scheduler)
- Anti-thief system
- ATSC 3.0 ready

Main Common Features

- ASI MPEG-2 TS seamless input.
- MPEG-2 TS over IP TS 102 034 V1.5.2 (2014-04).
- MPEG-2 TS encapsulated in RTP (Real-time Transport Protocol according to RFC 3550 TS 102 034, clause 7.1.1. FEC management SMPTE 2022-1 (Pro MPEG CoP 3).
- IGMPv2/v3 support.
- MFN and SFN operations.
- Internal GPS / Glonass receiver.
- Internal clock: Oven Controlled OCXO oscillator (10 MHz and 1 PPS).
- Output clock: 1 PPS and 10 MHz.
- Bit rate adaptation plus PCR re-stamping.
- RF main and monitoring outputs (Spectrum, MER, Constellation).
- Test Modes:
 - CW insertion
 - Null packet insertion
- Linear and non-linear Adaptive digital pre-correction circuits, when operated as transmitter.
- Linear and non-linear digital pre-correction circuits, when operated as repeater.
- Embedded HTTP server
- Management: Embedded SNMP v3 server - Embedded Web server.
- GbE Ports: GbE 1: 10/100/1000 Base T Management port.
- Redundancy: Input autoswitch algorithm supported.
- Security: Authentication for GUI access supported.

Main Features DVB-T/T2 Version

- Signal modulation compliant with:
 - ETSI EN 300 744 v16.1
 - ETSI EN-302 755 (DVB-T2) standard 1.4.1
 - ETSI TS 101 191 v1.4.1 (SFN)
- T2-MI compliant with ETSI EN-102 773 V1.4.1 (T2-MI) standard
- T2-MI input over IP or ASI
- ETR290 and T2-MI alarms
- Full Single-PLP compatibility (including MISO and PAPR reduction)
- Capable to transmit MPLP, Up to 16 PLP
- Bit rate adaptation plus PCR restamping in S-PLP
- Modulated DVB-T2 RF signal input (VHF/UHF) – when operating as repeater.

Main Features ISDB-Tb Version

- Signal modulation compliant with:
 - ABNT NBR 15601 & ABNT NBR 15608-1 (ISDB-Tb)
- BTS Input over ASI and over IP
- Modulated ISDB-Tb RF signal Input in rebroadcasting mode
- Emergency flag management (detection and insertion)
- Test Modes:
 - CW insertion
 - Null packet insertion, separated for each Layer
- Remux capabilities (optional):
 - BTS generation from input TS/BTS
 - Up to 2 input sources to build each Transmission Layer
 - PID filtering and remapping
 - Internal Carousel Editing, Store and Playing
 - IIP (including SFN information) insertion
 - BTS Compressor /De-Compressor Embedded

Main Features ATSC Version

- Compliant to ATSC A/53 and A/65 standard
- Compliant to A/153 ATSC-MH standard
- SMPTE310, RF, SSI Input:
 - Support 4 ASI input
 - Support 4 SSI input
 - Support 2 ASI output
 - Support 2 MPEG over IP input/output channels on GBE port 2-3
- Enable/Disable of cable equalizer bypass on input ASI ports
- One RF input to operate in rebroadcasting mode.
- Support the Editing of Virtual Channel Table in Translator mode
- Supports a measure board for the monitoring of the modulated signal: SNR, BER, SER e LOCK
- Amber switching implemented as a search for valid input when the priority one is not locked.
- Test modes: CW, Force Null Packets and PRBS
- Redundancy: Input auto-switch algorithm supported
- Option A/110b compliant for SFN transmission
- Option: A/110b compliant for STL with ATSC-MH transmission



ARK-X

Configurations



1. Transmitter Only Version

Main Common Features

- ASI MPEG-2 TS seamless input.
- MPEG-2 TS over IP TS 102 034 V1.5.2 (2014-04) seamless Input.
- MPEG-2 TS encapsulated in RTP (Real-time Transport Protocol according to RFC 3550 TS 102 034, clause 7.1.1. FEC management SMPTE 2022-1 (Pro MPEG CoP 3).
- IGMPv2/v3 support.
- MFN and SFN operations.
- Internal GPS / Glonass receiver.
- Internal clock: Oven Controlled OCXO oscillator (10 MHz and 1 PPS).
- Output clock: 1 PPS and 10 MHz.
- Bit rate adaptation plus PCR re-stamping.
- RF main and monitoring outputs (Spectrum, MER, Constellation).
- Test Modes:
 - CW insertion
 - Null packet insertion
- Linear and non-linear Adaptive digital pre-correction circuits, when operated as transmitter.
- Linear and non-linear digital pre-correction circuits, when operated as repeater.
- Embedded HTTP server
- Management: Embedded SNMP v3 server - Embedded Web server.
- GbE Ports: GbE 1: 10/100/1000 Base T Management port.
- Redundancy: Input autoswitch algorithm supported.
- Security: Authentication for GUI access supported.

2. Transmitter with Satellite Receiver

DVB-S2 Input Configuration - Satellite Input Specifications

- N. SAT Inputs: 1
- Connector type: F Female
- Input impedance: 75 ohm
- Input level: -81 dBm up to -17 dBm
- Supported symbol rates: 1 to 45 Msymb/s (DVB-S) / 1 to 67.5 (DVB-S2 depending on modulation scheme).
- DiSEqC: 2.0
- TS interface: broadcast reception and ISI filtering supported.
- Supported standards: ETSI EN 302 307 V1.1.1 (DVB-S2)

3. Transmitter with Satellite Receiver with DEC

DVB-S2 Input and CAM Configuration - Satellite and CAM Specifications

- N. SAT Inputs: 1
- Connector type: F Female
- Input impedance: 75 ohm
- Input level: -81 dBm up to -17 dBm
- Supported symbol rates: 1 to 45 Msymb/s (DVB-S) / 1 to 67.5 DVB-S2 depending on modulation scheme).
- DiSEqC: 2.0
- TS interface: broadcast reception and ISI filtering supported.
- Common Interface:
- N° card slots: 1 - Type: PCMCIA
- Supported standards: ETSI EN 302 307 V1.1.1 (DVB-S2)

4. Transposer and Re-Transmitter (Regenerative)

Transposer and Re-Transmitter (Regenerative) Configuration - Terrestrial RF IN Specifications

- N. RF Inputs: 1
- Connector type: N Female
- Input impedance: 50 ohm
- Input level: -81 dBm up to -17 dBm
- Supported standards: DVB-T/H, DVB-T2, ATSC, ISDB-T

Front End Option

- Digitizer with Analog A/V Inputs Configuration
- SAT without CAM receiver
- SAT with CAM receiver
- T2/ ATSC/ ISDB- Tb Receiver for Transposer, Re-Transmitter, Gap Filler

5. Transmitter with Analog A/V Inputs

Digitizer with Analog A/V Inputs

- Inputs: 4 SDI, 2 CVBS and 2 L/R
- Supported Composite Standards: NTSC CVBS, PAL (B, D, G, H, I, M, N) CVBS
- Supported SDI Standard: SMPTE 259M-C – Component 4:2:2, 270Mb/s for 525 and 625 lines, 13.5 MHz sampling, 4x3 and 16x9 aspect ratios.
- Outputs: 1 RF, 1 RF Monitor - 2 SDI for inputs bypass
- Test modes: CW, CW AV, Mute Audio Carrier, Mute Audio, Audio Test Tone, Video In, SMPTE Bars, Horizontal Bars, Red Field, ITS0, ITS1, ITS2, ITS3 , ITS4.
- A/V Inputs Specifications:
- Analog Video input:
 - N°Inputs: 2 CVBS
 - Connector type: BNC
 - Input impedance: 75 ohm
 - Supported video standards: PAL B,D,G,H,I,M,N, NTSC
- Analog Audio input
 - N°Inputs: 2 L/R couples
 - Connector type: XLR3 (Cannon f)
 - Input impedance: 600 Ohm balanced
 - Input Level: +6dBm +/- 6 dB

ARK-X Series

Models	Output Band	Working Class	Dimensions	Output Connector	Cooling	DVB W rms	ISDB-T W rms	DTMB W rms	ATSC W rms	ATV ps	MER dB	Shoulders (@ Fo 3.5 MHz ATSC) or (@ Fo 4.3 MHz DVB) or (@ Fo 3.3 MHz ISDB-T)
ARK-X 000/U	UHF	A	1 RU	N	Air	1mw	1mw	1mW	1mw	1mW	> 40	-39
ARK-X 000/V	VHF (I)	A	1 RU	N	Air	1mw	1mw	1mW	1mw	1mW	> 40	-39
ARK-X 000/I	VHF (III)	A	1 RU	N	Air	1mw	1mw	1mW	1mw	1mW	> 40	-39
ARK-X 050/U	UHF	A	1 RU	N	Air	5	5	5	6	10	> 40	-39
ARK-X 050/V	VHF (I)	A	1 RU	N	Air	5	5	5	6	10	> 40	-39
ARK-X 050/I	VHF (III)	A	1 RU	N	Air	5	5	5	6	10	> 40	-39

Specifications and characteristics are subject to change without notice.

ARK-X

Configurations

Standard						
Front-End	ATV	DVB-T/H	DVB-T2	ISDBT	ATSC	DTMB
None	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
Digitalizer A/V Input option	Transmitter with A/V analog inputs	Transmitter with A/V analog inputs (*)	Transmitter with A/V analog inputs (*)	Transmitter with A/V analog inputs (*)	Transmitter with A/V analog inputs (*)	Transmitter with A/V analog inputs (*)
DVB-S/S2	✖	Transmitter with DVB-S/S2 RF input	Transmitter with DVB-S/S2 RF input	Transmitter with DVB-S/S2 RF input	Transmitter with DVB-S/S2 RF input	Transmitter with DVB-S/S2 RF input
DVB-S/S2 + CAM	✖	Transmitter with DVB-S/S2 RF input (with CAM)	Transmitter with DVB-S/S2 RF input (with CAM)	Transmitter with DVB-S/S2 RF input (with CAM)	Transmitter with DVB-S/S2 RF input (with CAM)	Transmitter with DVB-S/S2 RF input (with CAM)
DVB-T/T2	✖	Re-Transmitter/ Transposer / GapFiller Echo Canceller	Re-Transmitter/ Transposer / GapFiller Echo Canceller	✖	✖	✖
ISDBT	✖	✖	✖	Re-Transmitter/ Transposer / GapFiller Echo Canceller	✖	✖
ATSC	✖	✖	✖	✖	Re-Transmitter/ Transposer / GapFiller Echo Canceller	✖
DTMB	✖	✖	✖	✖	✖	Transposer / GapFiller Echo Canceller

(*) In case of Dual cast ATV+DTV operation mode

ARK-X Configurations:

Automatic Digital/Analog

Transposer Translator Gap Filler

Regenerative Transmitter

Transmitter

SAT RX with CAM

SAT RX

AV > SDI> MOD > RF

RF > IF > RF

RF > ASI > MOD > RF

IP + ASI > MOD > RF

SAT > TS> MOD > RF

SAT > TS> MOD > RF



I/O Specifications		
	Front	
RF Front-End input	Please refer to various configurations for a complete description of all the available front-end modules	
GPS RF Input	N° Inputs: 1 Sensitivity: -165dBm Connectors: TNC/SMA	
RF Output Monitor	N° Inputs: 1 Level: -40dB Connectors: SMA	
Gigabit Ethernet	N° Connectors: 3 Connector: RJ45 Supported standards: IEEE 802.3	
ASI Output Monitor	Connectors used for monitoring purposes: N° outputs: 2 Connector type: BNC Input impedance: 75 ohm Input voltage: 800 mVpp (500 to 1200mVpp) Supported standards: CEI EN 50083-9	
ASI/BTS/SSI/SDI Input	Connectors used as ASI, SMPTE-310 or SDI: N° Inputs: 4 Connector type: BNC Input impedance: 75 ohm Input voltage: 800 mVpp (500 to 1200mVpp)	Supported standards: CEI EN 50083-9 SMPTE 310 SMPTE 259M
	Back	
Opto TLC - DB15	N° Inputs: 4 Connectors: SUB-D 15p Female Max current: -5 mA	
Relays TLS - DB25	N° Outputs: 4 Connectors: SUB-D 25p Female Max voltage: 125VAC / 60VDC @ 0,3A – 30VDC @ 1A	
DB9 – RS232	N° inputs: 1 Connectors: SUB-D 9p Female Speed: up to 230400 bps 8-bit data No parity bits 1 stop bit	
DB9 – RS485 CAM BUS	N° inputs: 1 Connectors: SUB-D 9p Female	
10 MHz Input	N° Inputs: 1 Connector: BNC Input impedance: 50 ohm Input voltage: 2 Vpp	
1PPS Input	N° Inputs: 1 Connector: BNC Input impedance: 50 ohm Input voltage: TTL (min 1,7V) Pulse width: 100us	
10 MHz Output	N° Outputs: 1 Connector: SMB Output impedance: 50 ohm Output voltage: TTL (min 2,4V) Output voltage: 2 Vpp	
1PPS Output	N° Outputs: 1 Connector: SMB Z load: 50 ohm Output voltage: TTL (min 2,4V) Pulse width: 100us	
RF Measure board inputs Linear /Non linear precorrections	N° Inputs: 2 Connector type: SMA Input impedance: 50 ohm Input level: -40 dBm up to -8.5 dBm	Supported standards: DVB-T/T2 ISDB-T ATSC
RF Output	N° Outputs: 1 Connector: N	



ARK-X

Configurations

ARK-X Series - DTV Specifications

[illegible]

Specifications may be subject to change without notice

ARK-X Series - ATV Specifications

Analog TV Specifications		
		ITU-R BT 470.7
Analog TV	standards	B/G, D/K, M, M1, N, I, I1
	Color transmission	PAL, NTSC, SECAM (not available)
	Sound transmission	IRT dual-sound coding, FM single sound and NICAM728 (13 dB/20 dB), FM single sound(-10 dB)
	Inputs	1 × video (75 BNC), 2 × audio (bantam)
Video	Video input	0,5 to 1,5 V
	Regulation of output power	+/- 3%
	Variation of output power	+/- 2%
	Differential gain	+/- 3%
	Differential phase	+/- 3°
	Low frequency linearity	8%
	ICPM	+/- 2°
	S/N	>60 dB
	K Factor	2%
	20 T	3%
	Spourius and Harmonics radiation	>60 dB
	In Channel IMD	> 58 dB
Sound	Modulation capability	+/- 120 KHz
	Monoaural input	settable 0 to 12 dBm
	Pre-Emphasys	75 / 50 S
	Frequency response	+/- 0,5 dB from 30 to 15000 Hz
	Harmonic distorsion	0,5% from 30 to 15000 Hz
	FM Noise	60 dB with de-emphasis
	AM Noise	50 dB from 30 to 15000 Hz
	Synchronous AM noise (parasitic AM)	> 50 dB
	IRT Sound	available on request
	NICAM Sound	available on request

Specifications may be subject to change without notice



FUTURE SFT/XE

SERIES

eXtreme Efficiency (XE) Easy-Maintenance design

The FUTURE SFT/XE Transmitter Series is the result of the intense activity of Screen R&D on High Performance RF Amplifiers and high efficiency latest generation LDMOS devices, combined with the new widely improved software precorrection capability and very efficient power supplies (>96%).

This new Screen XET™ (eXtreme Efficiency Technology) grants RF efficiency over 50% and overall efficiency up to 42% without decreasing performance in terms of modulation error rate and shoulders and with the well-known reliability of Screen Products.

The new XET™ Technology allows stunning performances for broadcasting: higher efficiency, compactness and cooling systems reduction are just some of the improvements gained.

The FUTURE SFT/XE Transmitter Series features a built-in SFN adapter

and very advanced SWDT® (Software Defined Transmitters) technology, that allows implementing different modulation patterns – either digital or analog – (DVB, ATSC, ISDB-T, DTMB, DAB, DAB+, T-DMB, ATV, etc.) in the same hardware.

Moreover, the SWDT® technology allows selection of operation modes in various ways: remotely, using a clean contact; via SNMP commands; via TCP/IP, using the Web graphic interface; or even via a dedicated command inserted into the transport stream.

Functional interfaces are available for complete remote control of the transmitters by serial protocols or TCP/IP ports, thanks to the internal Web server or built-in SNMP.

Nevertheless, the High Efficiency reduces management costs and helps the environment.

SFK 142/XE 1400 W rms

Amplifier

New SFK/XE eXtreme Efficiency DTV Amplifier Series

- XET™ eXtreme Efficiency Technology with latest generation LDMOS and Doherty architecture
- Hot pluggable amplifier modules
- Ultra Compact Design
- Hot pluggable redundant Power Supplies for instant replacement
- Powerful cooling system suitable to work in extreme ambient conditions
- Easy and Fast maintenance design



SFT/XE Series - MAIN Specifications

Main Specifications		
Frequency range	UHF (Band IV/V)	470 to 862 MHz, in 1 Hz Step
	VHF (Band IIII)	170 to 255 MHz, in 1 Hz Step
Available standards (all standars are full compliant)	Digital TV and Analog TV	DVB-T, DVB-T2, DVB-H, ISDB-Tb, ATSC, ATSC Mobile DTV,DTMB, ATV
Power Supply	AC Line Voltage	380 to 415 (3 phases), 208 to 240 Delta or Star; 47 Hz to 63 Hz (specify at order)
	AC Line variations	+/- 15%
	Power factor	0,98
Environmental Conditions	Altitude	2500 m above sea level (> 2500 m on request)
	Operating temperature range	-10°C to +45°C at sea level, upper limit derated of 2 °C per 300m over 1000 m above sea level
	Relative humidity	95 %, not-condensing
	Cooling method	Forced Air / liquid with external heat exchanger with redundant pump and fan
RF output	Output power range	See Specific Data Sheet or selection table in next pages
	RF load impedance	50 Ohm
	VSWR	Power reduction after exceeding the set value or switch off after three attempts
	RF Output connector	See Specific Data Sheet or selection table in next pages
Transmitter size	Rack Unit, Weight, Dimensions	See Specific Data Sheet or selection table
Synchronization	Reference frequency	10 MHz, 0.1 V to 5 V (Vpp) or TTL, BNC
	Reference pulse	1pps (1 Hz, TTL, BNC)
Operations Control and Monitoring	Remote	Web based Interface
		SNMP V1 V2 V3
		Telnet access via ethernet
	Local	Extensive front panel control (color display, keypad)
		Local terminal on RS232 or LAN
		USB for upgrade
Compliance and Conformity	RoHS	2011/65/EC
	Radio Equipment Directive (RED)	2014/53/EU
	Safety	EN 60215
	EMC	EN 301-4891-1 - ETSI EN 302 296-2 V1.2.1 (2011-05)
	FCC	Part 74
	WEEE	2012/19/EU
	Manufacturing	ISO 9001:2015

Specifications may be subject to change without notice

SFT/XE Series - Selection tables

Selection Table UHF (/U)																
Models	Output Band	Working Class	Dimensions	N. Amplifiers	kind of Ampl	Output Connector	Cooling	Meter board N.	DVB W rms	ISDB-T W rms	DTMB W rms	ATSC W rms	System Efficiency > 33 dB Mer	Shoulders (@ Fo 3.5 MHz ATSC) or (@ Fo 4.3 MHz DVB) or (@ Fo 3.3 MHz ISDB-T)	System Efficiency > 36 dB Mer	Shoulders (@ Fo 3.5 MHz ATSC) or (@ Fo 4.3 MHz DVB) or (@ Fo 3.3 MHz ISDB-T)
SFT100UA	UHF	AB	1 RU compact			N	Air		10	10	10	12	N/A	-36	N/A	-39
SFT500UA	UHF	AB	1 RU compact			N	Air		50	50	50	60	N/A	-36	N/A	-39
SFT151U/XE/A	UHF	AB+C	2 RU compact			7/16"	Air		150	150	150	180	up to 32%	-36	up to 30%	-39
SFT251U/XE/A	UHF	AB+C	2 RU compact			7/16"	Air		250	250	250	300	up to 36%	-36	up to 34%	-39
SFT501U/XE/A	UHF	AB+C	3 RU			7/16"	Air		500	500	500	600	up to 38%	-36	up to 38%	-39
SFT 701 U/XE/A	UHF	AB+C	1+4 RU	1	SFK701UXEA	7/16"	Air		700	700	700	800	up to 38%	-36	up to 38%	-39
SFT102U/XE/A	UHF	AB+C	1 x 22 RU	1	SFK102UXEA	7/8"	Air		1000	1000	1000	1200	up to 40%	-36	up to 38%	-39
SFT152U/XE/A	UHF	AB+C	1 x 22 RU	1	SFK152UXEA	7/8"	Air		1500	1500	1400	1800	up to 42%	-36	up to 40%	-39
SFT252U/XE/A/L	UHF	AB+C	1 x 40 RU	2	SFK152UXEA/L	1+5/8"	Air/Liquid	1	2500	2500	2500	3000	up to 42%	-36	up to 40%	-39
SFT502U/XE/A/L	UHF	AB+C	1 x 40 RU	4	SFK152UXEA/L	3+1/8"	Air/Liquid	1	5000	5000	5000	6000	up to 42%	-36	up to 40%	-39
SFT752U/XE/A/L	UHF	AB+C	1 x 40 RU	6	SFK152UXEA/L	3+1/8"	Air/Liquid	1	7500	7500	7500	9000	up to 42%	-36	up to 40%	-39
SFT103U/XE/A/L	UHF	AB+C	1 x 45 RU	8	SFK152UXEA/L	3+1/8"	Air/Liquid	1	10000	10000	10000	12000	up to 42%	-36	up to 40%	-39
SFT153U/XE/L	UHF	AB+C	2 x 45 RU	12	SFK152UXEL	3+1/8"	Liquid	2	15000	15000	15000	18000	up to 42%	-36	up to 40%	-39
SFT203U/XE/L	UHF	AB+C	2 x 45 RU	16	SFK152UXEL	4+1/2"	Liquid	2	20000	20000	20000	24000	up to 42%	-36	up to 40%	-39
SFT303U/XE/L	UHF	AB+C	3 x 45 RU	24	SFK152UXEL	4+1/2"	Liquid	3	30000	30000	30000	36000	up to 42%	-36	up to 40%	-39
SFT403U/XE/L	UHF	AB+C	4 x 45 RU	32	SFK152UXEL	52/120	Liquid	4	40000	40000	40000	48000	up to 42%	-36	up to 40%	-39
SFT503U/XE/L	UHF	AB+C	5 x 45 RU	40	SFK152UXEL	52/120	Liquid	5	50000	50000	50000	60000	up to 42%	-36	up to 40%	-39
SFT603U/XE/L	UHF	AB+C	6 x 45 RU	48	SFK152UXEL	52/120	Liquid	6	60000	60000	60000	72000	up to 42%	-36	up to 40%	-39

Specifications and characteristics may be subject to change without notice.

Selection Table VHF Band III (/V)															
Models	Output Band	Working Class	Dimensions	N. Amplifiers	Amplifier Model	Output Connector	Cooling	DVB rms	W	ISDBT W rms	ATSC W rms	Overall Efficiency (33dB MER)	Shoulders (@ Fo 4.3 MHz DVB) or (@ Fo 3.3 MHz ISDB-T) or (@ Fo 3.5 MHz ATSC)	Overall Efficiency (36dB MER)	Shoulders (@ Fo 4.3 MHz DVB) or (@ Fo 3.3 MHz ISDB-T) or (@ Fo 3.5 MHz ATSC)
SFT 100 V/A	VHF (III)	AB	1 RU			N	Air	12	12	15	N/A	-36	N/A	-39	
SFT 700 V/A	VHF (III)	AB	1 RU			N	Air	70	70	100	N/A	-36	N/A	-39	
SFT 151 V/XE/A	VHF (III)	AB+C	2 RU compact			N	Air	150	150	180	up to 32%	-36	up to 30%	-39	
SFT 251 V/XE/A	VHF (III)	AB+C	3 RU compact			7/16"	Air	250	250	300	up to 36%	-36	up to 34%	-39	
SFT 501 V/XE/A	VHF (III)	AB+C	3 RU	1	SFK 501 V/XE/A	7/16"	Air	500	500	600	up to 38%	-36	up to 36%	-39	
SFT 112 V/XE/A	VHF (III)	AB+C	1 x 22 RU	1	SFK 112 V/XE/A	7/8"	Air	1100	1100	1300	up to 38%	-36	up to 36%	-39	
SFT 202 V/XE/A or L	VHF (III)	AB+C	1 x 30 RU	2	SFK 112 V/XE/A or L	1+5/8"	Air or Liquid	2000	2000	2400	up to 38%	-36	up to 36%	-39	
SFT 302 V/XE/A or L	VHF (III)	AB+C	1 x 40 RU	3	SFK 112 V/XE/A or L	1+5/8"	Air or Liquid	3000	3000	3600	up to 38%	-36	up to 36%	-39	
SFT 502 V/XE/A or L	VHF (III)	AB+C	1 x 45 RU	6	SFK 112 V/XE/A or L	3+1/8"	Air or Liquid	5000	5000	6000	up to 38%	-36	up to 36%	-39	
SFT 752 V/XE/A or L	VHF (III)	AB+C	1 x 40 RU	8	SFK 112 V/XE/A or L	3+1/8"	Air or Liquid	7500	7500	9000	up to 38%	-36	up to 36%	-39	
SFT 103 V/XE/A or L	VHF (III)	AB+C	2 x 45 RU	12	SFK 112 V/XE/A or L	3+1/8"	Air or Liquid	10000	10000	12000	up to 38%	-36	up to 36%	-39	
SFT 153 V/XE/L	VHF (III)	AB+C	2 x 45 RU	16	SFK 112 V/XE/L	3+1/8"	Liquid	15000	15000	18000	up to 38%	-36	up to 36%	-39	
SFT 203 V/XE/L	VHF (III)	AB+C	3 x 45 RU	24	SFK 112 V/XE/L	3+1/8"	Liquid	20000	20000	24000	up to 38%	-36	up to 36%	-39	

Specifications and characteristics may be subject to change without notice.

Code	Options
DD	Option Dual Driver, including automatic change-over switch unit
X2	Front End Audio/Video digitalizer to input in A/V direct to modulator
X3	Front End Receiver SAT
X4	Front End Receiver SAT+CAM
A1	Front End Retransmitter ATSC
D1	Front End Retransmitter DVB-T/T2
I1	Front End Retransmitter ISDB-T
GF	Gap Filler with echo canceller
IR	ISDB-T ReMux SW Option
ID	ISDB-T DeCompressor SW Option
IF	IF 36MHz output for up converter stage
E1	ETI HW Input interface (only for DAB modulator in VHF band)
2A	TX with 2 amplifiers (not for compact version)
1+1	Exchanger 1+1 standby system kits
N+1	Exchanger N+1 standby system kits
DC	DC power supply

Specifications and characteristics may be subject to change without notice.



SCREEN FUTURE S.r.l.

Via Gian Battista Cacciamali, 71 - 25125 - Brescia - Italy

Phone: +39 030 57831 - Fax +39 030 5783888

info@screen.it - www.screen.it